


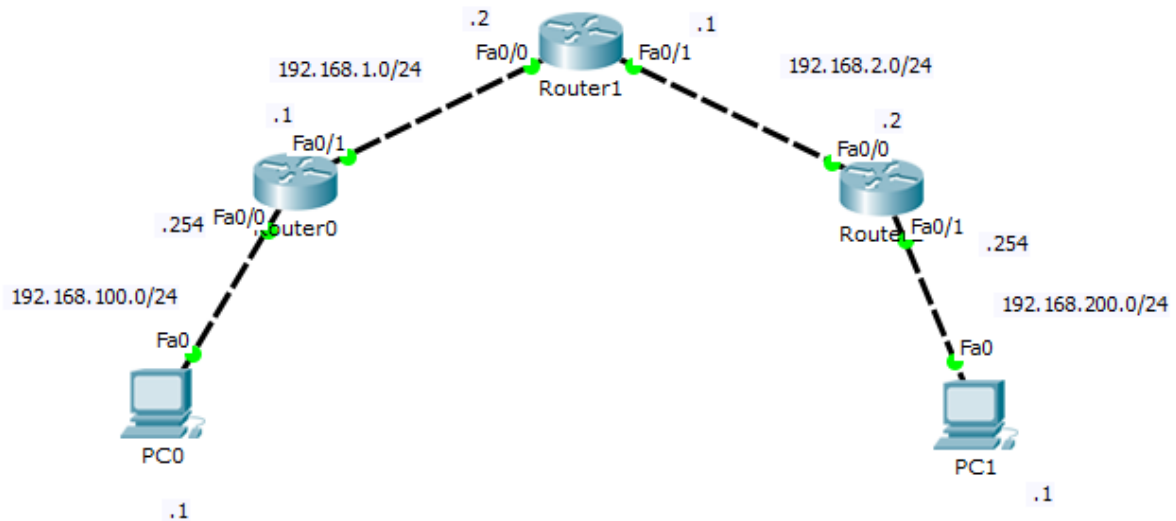

Router 0

```

ena
conf t
int fa0/0
ip add 192.168.100.254 255.255.255.0
no sh
int fa0/1
ip add 192.168.1.1 255.255.255.0
no sh
exit
ip route 192.168.2.0 255.255.255.0 192.168.1.2
ip route 192.168.200.0 255.255.255.0 192.168.1.2
=====

```

Router1

```

ena
conf t
int fa0/0
ip add 192.168.1.2 255.255.255.0
no sh
int fa0/1
ip add 192.168.2.1 255.255.255.0
no sh
exit
ip route 192.168.100.0 255.255.255.0 192.168.1.1
ip route 192.168.200.0 255.255.255.0 192.168.2.2
=====

```

Router2

```

ena
conf t
int fa0/0
ip add 192.168.2.2 255.255.255.0
no sh
int fa0/1
ip add 192.168.200.254 255.255.255.0
no sh
exit
ip route 192.168.1.0 255.255.255.0 192.168.2.1
ip route 192.168.100.0 255.255.255.0 192.168.2.1

```